

# PRODUCT SPECIFICATION



**Part No. : JH-10G14F39-R1C**  
**High Power LED**






## Catalog

1. Product Features	P2
2. Dimensions	P2
3. Absolute Maximum Rating	P3
4. Optical Character	P3
5. Optical Character Curves	P4
6. Spectrum Curves	P5
7. Viewing Angle Curves	P5
8. Cautions	P6

## 1. Product Features

- High Brightness Green LED
- Plane Package
- Viewing Angle 140 Degree
- Chip Material: AlGaInP
- RoHS Compliant

## 2. Dimensions

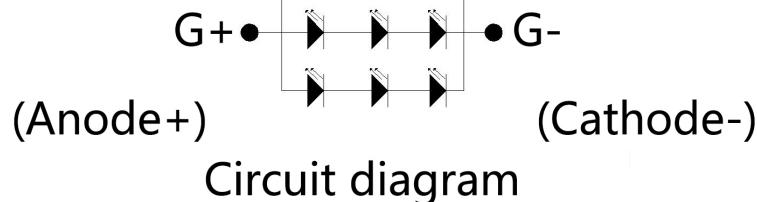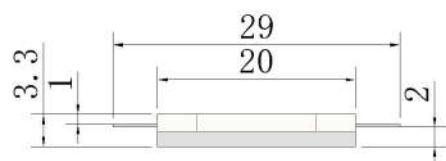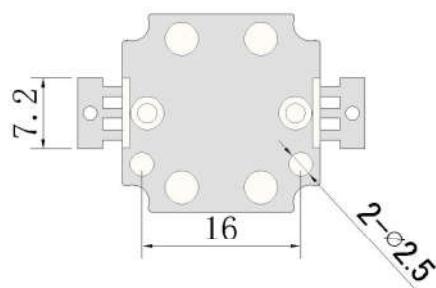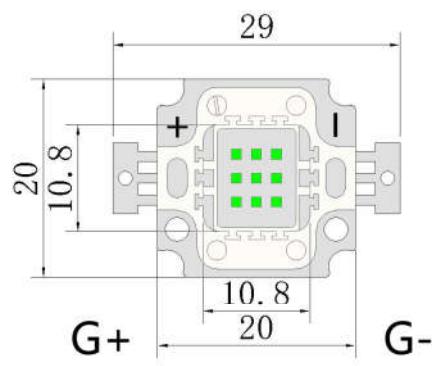

### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.

### 3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	1050	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	1200	mA
Reverse Voltage	VR	12	V
Power Dissipation	PD	10	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Lead Soldering Temperature	TSOL	260°C	

### 4. Optical Character @ Ta=25° C





Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	G	9	9.5	10	V	I <sub>F</sub> =1050mA
Luminous Flux	Φ	G	700	750	800	Lm	I <sub>F</sub> =1050mA
Dominant Wavelength	Wld	G	520	522.5	525	nm	I <sub>F</sub> =1050mA
Reverse Current	IR		0		10	μA	V <sub>R</sub> =12V
Viewing Angle	2θ1/2				140	deg	I <sub>F</sub> =1050mA
Recommend Forward Current	IF(rec)	G			1050	mA	

#### Notes:


Measurement tolerance of forward voltage ±0.1V

## 5. Optical Character Curves


( 25 ° Ambient Temperature Unless Otherwise Noted )

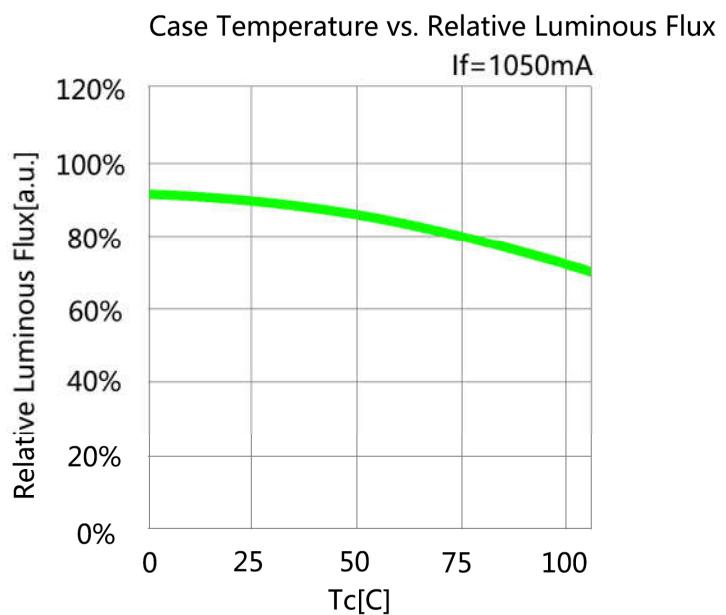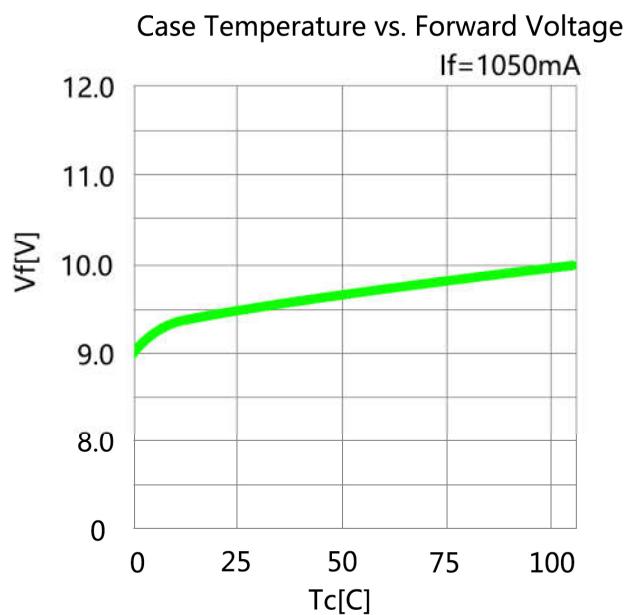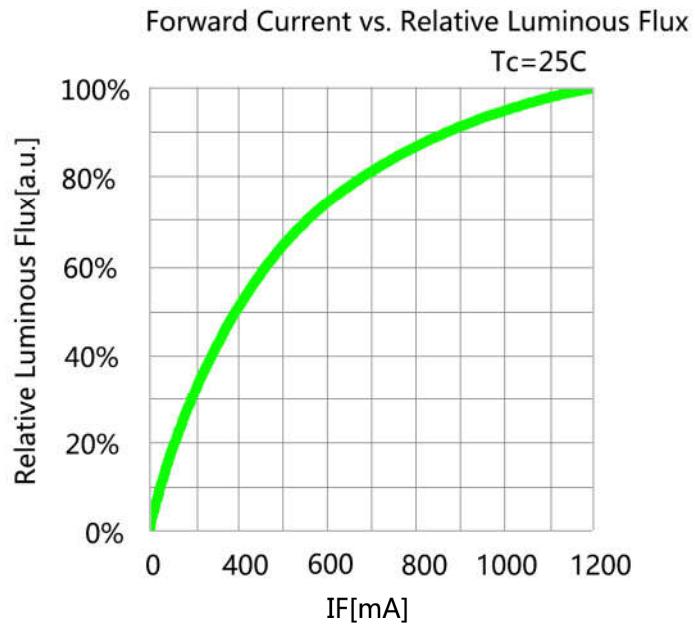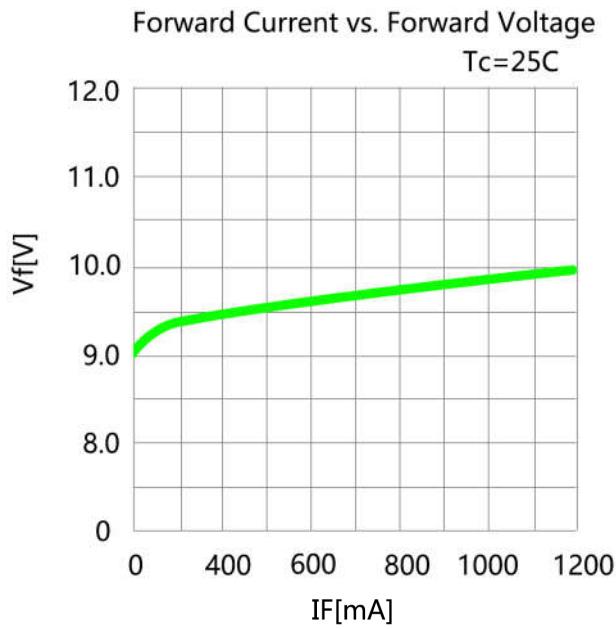

## 6. Spectrum Curves

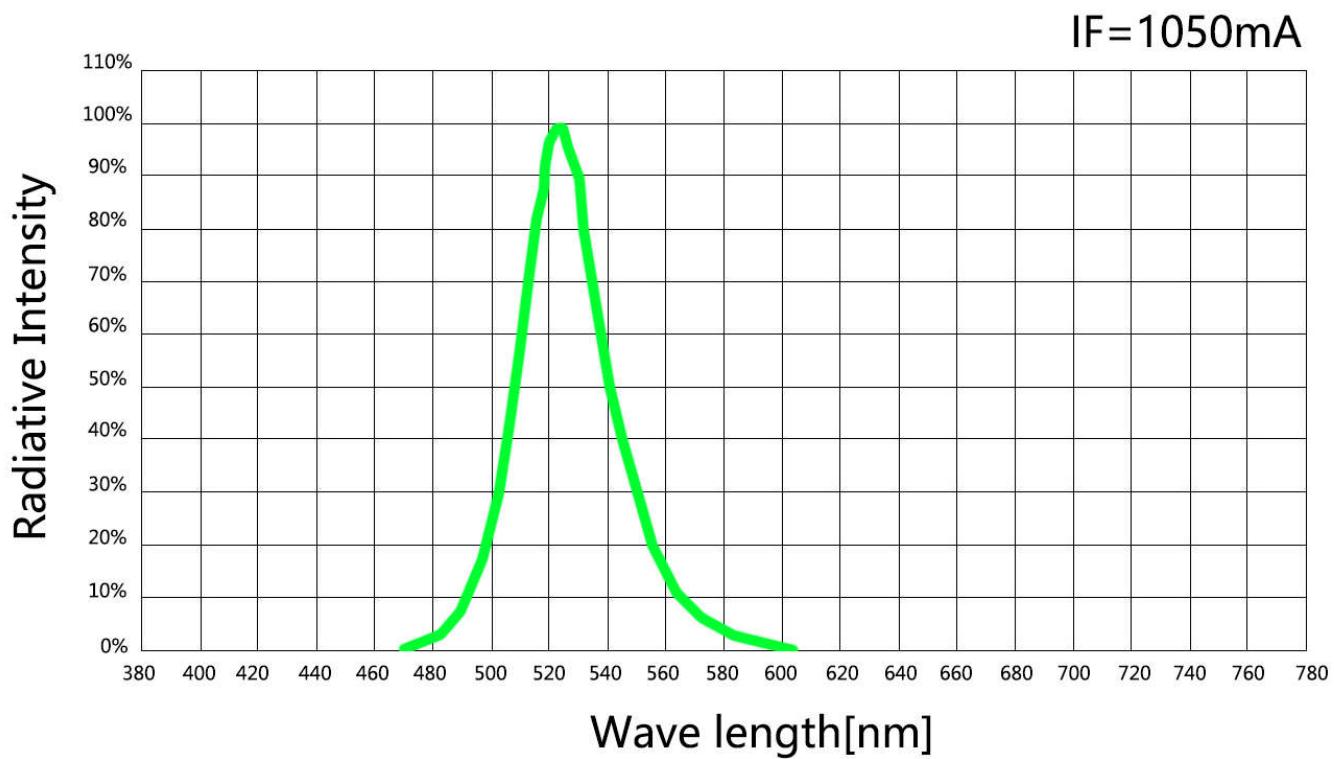

## 7. Viewing Angle Curves

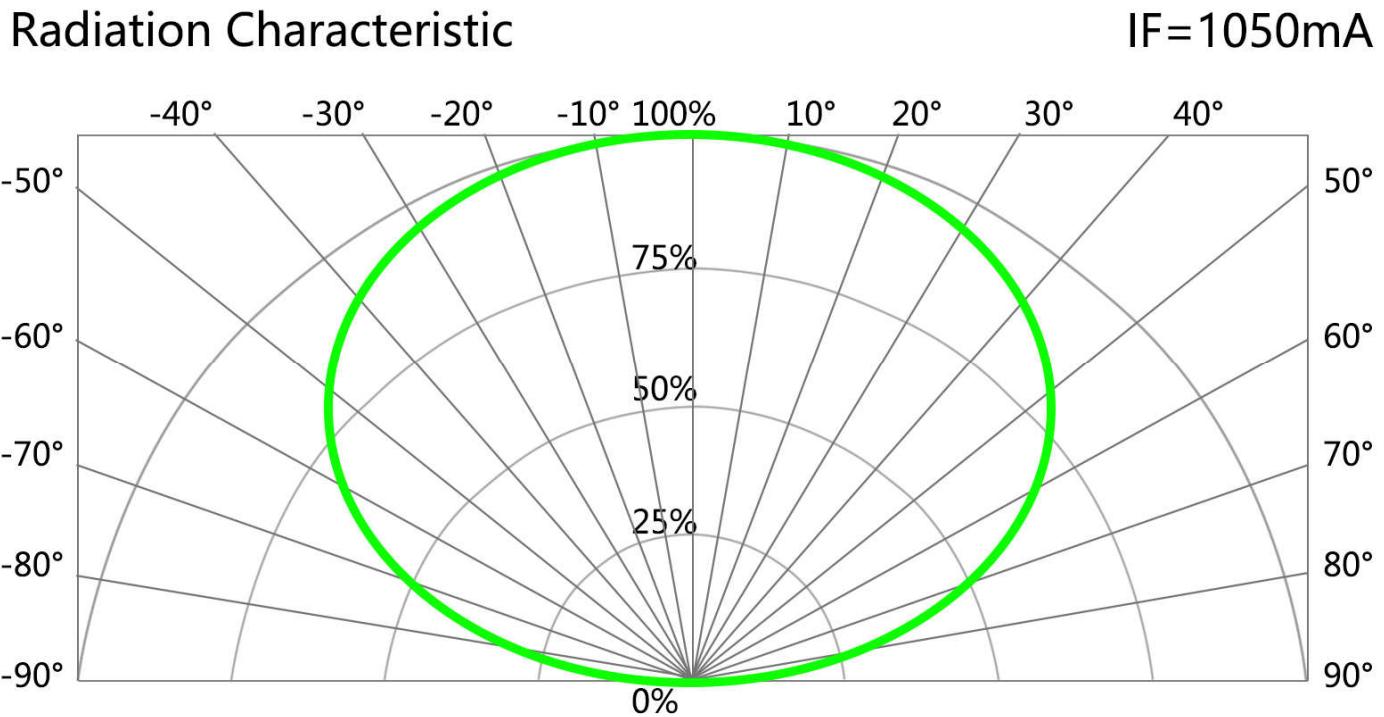

## 8.Cautions

### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



### 2. Heat Dissipation

- A、It is recommended to configure reasonable heat dissipation device for the product.
- B、The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

